




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03L 7/081, H03K 5/13	A1	(11) International Publication Number: WO 99/67882 (43) International Publication Date: 29 December 1999 (29.12.99)
(21) International Application Number: PCT/US99/07775 (22) International Filing Date: 9 April 1999 (09.04.99) (30) Priority Data: 09/102,740 22 June 1998 (22.06.98) US (71) Applicant: XILINX, INC. [US/US]; 2100 Logic Drive, San Jose, CA 95124 (US). (72) Inventors: HASSOUN, Joseph, H.; 205 Westchester Drive, Los Gatos, CA 95032 (US). GOETTING, F., Erich; 11659 Olive Spring Court, Cupertino, CA 95014 (US). LOGUE, John, D.; 3290 Serenity Drive, Placerville, CA 95667 (US). (74) Agents: YOUNG, Edel, M. et al.; Xilinx, Inc., 2100 Logic Drive, San Jose, CA 95124 (US).		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: DELAY LOCK LOOP WITH CLOCK PHASE SHIFTER

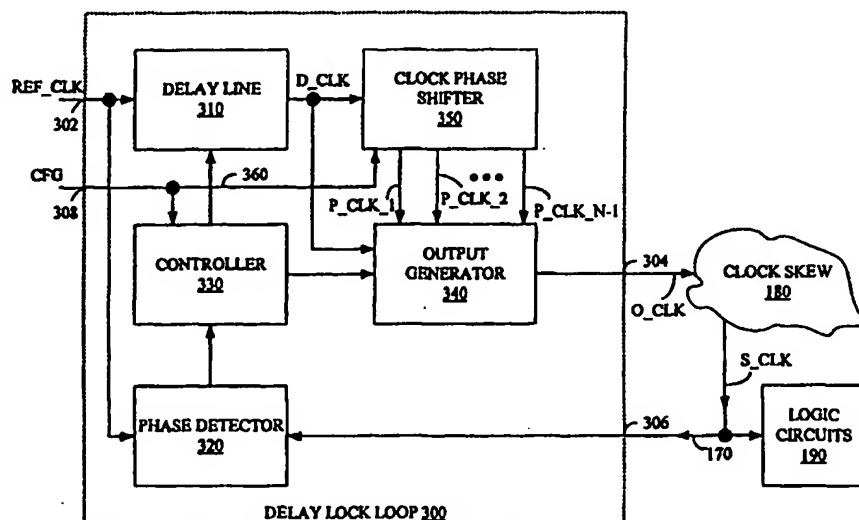

(57) Abstract

A delay lock loop uses a clock phase shifter with a delay line to synchronize a reference clock signal with a skewed clock signal. The delay line is coupled to a reference input terminal of the delay lock loop and generates a delayed clock signal that is provided to the clock phase shifter. The clock phase shifter generates one or more phase-shifted clock signals from the delayed clock signal. An output generator coupled to the delay line, the clock phase shifter, and an output terminal of the delay lock loop provides either the delayed clock signal or one of the phase-shifted clock signals as an output clock signal of the delayed lock loop. The propagation delay of the delay line is set to synchronize the reference clock signal with the skewed clock signal, which is received on a feedback input terminal of the delay lock loop. A phase detector compares the reference clock signal and the skewed clock signal to determine the appropriate propagation delay for the delay line.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DELAY LOCK LOOP WITH CLOCK PHASE SHIFTER

5 FIELD OF THE INVENTION

The present invention relates to delay lock loops (DLLs) for digital electronics. More specifically, the present invention relates to DLLs capable of locking clock signals over a wide frequency range.

10

BACKGROUND OF THE INVENTION

Synchronous digital systems, including board level systems and chip level systems, rely on one or more clock signals to synchronize elements across the system. Typically, one or more clock signals are distributed across the system on one or more clock lines. However, due to various problems such as clock buffer delays, high capacitance of heavily loaded clock lines, and propagation delays, the rising edges of a clock signal in different parts of the system may not be synchronized. The time difference between a rising (or falling) edge in one part of the system with the corresponding rising (or falling) edge in another part of the system is referred to as "clock skew".

25 Clock skew can cause digital systems to malfunction. For example, it is common for circuits in digital systems to have a first flip-flop output driving a second flip-flop input. With a synchronized clock on the clock input of both flip-flops, the data in the first flip-flop is successfully clocked into the second flip-flop. However, if the active edge on the second flip flop is delayed by clock skew, the second flip-flop might not capture the data from the first flip-flop before the first flip-flop changes state.

30 Delay lock loops are used in digital systems to minimize clock skew. Delay lock loops typically use delay elements to synchronize the active edges of a reference clock signal in one part of the system with a feedback clock signal from a second part of the system. Figure 1 shows a block diagram of a conventional delay lock loop 100 coupled to logic circuits 190. Delay lock loop 100, which comprises

a delay line 110 and a phase detector 120, receives a reference clock signal REF_CLK and drives an output clock signal O_CLK.

5 Delay line 110 delays reference clock signal REF_CLK by a variable propagation delay D before providing output clock signal O_CLK. Thus, each clock edge of output clock signal O_CLK lags a corresponding clock edge of reference clock signal REF_CLK by propagation delay D (see Figure 2A). Phase detector 120 controls delay line 110, as described
10 below. Delay line 110 is capable of producing a minimum propagation delay D_MIN and a maximum propagation delay D_MAX.

Before output clock signal O_CLK reaches logic circuits 190, output clock signal O_CLK is skewed by clock skew 180.
15 Clock skew 180 can be caused by delays in various clock buffers (not shown) or propagation delays on the clock signal line carrying output clock signal O_CLK (e.g., due to heavy loading on the clock signal line). To distinguish output clock signal O_CLK from the skewed version of output
20 clock signal O_CLK, the skewed version is referred to as skewed clock signal S_CLK. Skewed clock signal S_CLK drives the clock input terminals (not shown) of the clocked circuits within logic circuits 190. Skewed clock signal S_CLK is also routed back to delay lock loop 100 on a
25 feedback path 170. Typically, feedback path 170 is dedicated specifically to routing skewed clock signal S_CLK to delay lock loop 110. Therefore, any propagation delay on feedback path 170 is minimal and causes only negligible skewing.

30 Figure 2A provides a timing diagram of reference clock signal REF_CLK, output clock signal O_CLK, and skewed clock signal S_CLK. All three clock signals have the same frequency F (not shown) and period P, and all are active-high (i.e., the rising edge is the active edge). Since
35 output clock signal O_CLK is delayed by propagation delay D, a clock edge 220 of output clock signal O_CLK lags corresponding clock edge 210 of reference clock signal REF_CLK by propagation delay D. Similarly, a clock edge 230

of skewed clock signal S_CLK lags corresponding clock edge 220 of output clock signal O_CLK by a propagation delay SKEW, which is the propagation delay caused by clock skew 180 (Figure 1). Therefore, clock edge 230 of skewed clock signal S_CLK lags clock edge 210 of reference clock signal REF_CLK by a propagation delay DSKEW, which is equal to propagation delay D plus propagation delay SKEW.

Delay lock loop 100 controls propagation delay D by controlling delay line 110. However, delay line 110 cannot create negative delay; therefore, clock edge 230 cannot be synchronized to clock edge 210. Fortunately, clock signals are periodic signals. Therefore, delay lock loop 100 can synchronize reference clock signal REF_CLK and skewed clock signal S_CLK by further delaying output clock signal O_CLK such that clock edge 240 of skewed clock signal S_CLK is synchronized with clock edge 210 of reference clock signal REF_CLK. As shown in Figure 2B, propagation delay D is adjusted so that propagation delay DSKEW is equal to period P. Specifically, delay line 110 is tuned so that propagation delay D is increased until propagation delay D equals period P minus propagation delay SKEW. Although propagation delay DSKEW could be increased to any multiple of period P to achieve synchronization, most delay lock loops do not include a delay line capable of creating such a large propagation delay.

Phase detector 120 (Figure 1) controls delay line 110 to regulate propagation delay D. The actual control mechanism for delay lock loop 100 can differ. For example, in one version of delay lock loop 100, delay line 110 starts with a propagation delay D equal to minimum propagation delay D_MIN, after power-on or reset. Phase detector 110 then increases propagation delay D until reference clock signal REF_CLK is synchronized with skewed clock signal S_CLK. In another system, delay lock loop 100 starts with a propagation delay D equal to the average of minimum propagation delay D_MIN and maximum propagation delay D_MAX, after power-on or reset. Phase detector 120 then determines whether to increase or decrease (or neither) propagation

delay D to synchronize reference clock signal REF_CLK with skewed clock signal S_CLK. For example, phase detector 120 would increase propagation delay D for the clock signals depicted in Figure 2A. However, phase detector 120 would
5 decrease propagation delay D for the clock signals depicted in Figure 2C.

In Figure 2C, skewed clock signal S_CLK is said to "lag" reference clock signal REF_CLK, because the time between a rising edge of reference clock signal REF_CLK and the next rising edge of skewed clock signal S_CLK is less
10 than the time between a rising edge of skewed clock signal S_CLK and the next rising edge of reference clock signal REF_CLK. However, in Figure 2A, reference clock signal REF_CLK is said to "lag" skewed clock signal S_CLK, because
15 the time between a rising edge of skewed clock signal S_CLK and the next rising edge of reference clock signal REF_CLK is less than the time between a rising edge of reference clock signal REF_CLK and the next rising clock edge of skewed clock signal S_CLK. Alternatively, in Figure 2A
20 skewed clock signal S_CLK could be said to "lead" reference clock signal REF_CLK.

After synchronizing reference clock signal REF_CLK and skewed clock signal S_CLK, delay lock loop 100 monitors reference clock signal REF_CLK and skewed clock signal S_CLK
25 and adjusts propagation delay D to maintain synchronization. For example, if propagation delay SKEW increases, perhaps caused by an increase in temperature, delay lock loop 100 must decrease propagation delay D to compensate. Conversely, if propagation delay SKEW decreases, perhaps
30 caused by a decrease in temperature, delay lock loop 100 must increase propagation delay D to compensate. The time in which delay lock loop 100 is attempting to first synchronize reference clock signal REF_CLK and skewed clock signal S_CLK, is referred to as lock acquisition. The time
35 in which delay lock loop 100 is attempting to maintain synchronization is referred to as lock maintenance. The value of propagation delay D at the end of lock acquisition, i.e. when synchronization is initially established, is

delay D to synchronize reference clock signal REF_CLK with skewed clock signal S_CLK. For example, phase detector 120 would increase propagation delay D for the clock signals depicted in Figure 2A. However, phase detector 120 would
5 decrease propagation delay D for the clock signals depicted in Figure 2C.

In Figure 2C, skewed clock signal S_CLK is said to "lag" reference clock signal REF_CLK, because the time between a rising edge of reference clock signal REF_CLK and the next rising edge of skewed clock signal S_CLK is less
10 than the time between a rising edge of skewed clock signal S_CLK and the next rising edge of reference clock signal REF_CLK. However, in Figure 2A, reference clock signal REF_CLK is said to "lag" skewed clock signal S_CLK, because
15 the time between a rising edge of skewed clock signal S_CLK and the next rising edge of reference clock signal REF_CLK is less than the time between a rising edge of reference clock signal REF_CLK and the next rising clock edge of skewed clock signal S_CLK. Alternatively, in Figure 2A
20 skewed clock signal S_CLK could be said to "lead" reference clock signal REF_CLK.

After synchronizing reference clock signal REF_CLK and skewed clock signal S_CLK, delay lock loop 100 monitors reference clock signal REF_CLK and skewed clock signal S_CLK
25 and adjusts propagation delay D to maintain synchronization. For example, if propagation delay SKEW increases, perhaps caused by an increase in temperature, delay lock loop 100 must decrease propagation delay D to compensate. Conversely, if propagation delay SKEW decreases, perhaps
30 caused by a decrease in temperature, delay lock loop 100 must increase propagation delay D to compensate. The time in which delay lock loop 100 is attempting to first synchronize reference clock signal REF_CLK and skewed clock signal S_CLK, is referred to as lock acquisition. The time
35 in which delay lock loop 100 is attempting to maintain synchronization is referred to as lock maintenance. The value of propagation delay D at the end of lock acquisition, i.e. when synchronization is initially established, is

referred to as initial propagation delay ID.

However, as explained above, delay line 110 can only provide a propagation delay between a minimum propagation delay D_MIN and a maximum propagation delay D_MAX. During
5 lock maintenance, delay lock loop 100 may lose synchronization if a propagation delay D smaller than minimum propagation delay D_MIN is required to maintain synchronization. Similarly, synchronization may be lost if
10 a propagation delay D greater than maximum propagation delay D_MAX is required to maintain synchronization.

For example, if lock acquisition occurs while the system using delay lock loop 100 is at a very high temperature, delay lock loop 100 is likely to achieve synchronization with a very small initial propagation delay
15 ID, since propagation delay SKEW is likely to be large with respect to period P. As the system's temperature increases further, propagation delay SKEW is likely to increase to a point where propagation delay SKEW plus minimum propagation delay D_MIN is greater than period P. In this situation,
20 delay lock loop 100 must undergo lock acquisition again, which may introduce glitches and noise into output clock signal O_CLK, in turn causing glitches and noise in skewed clock signal S_CLK. For critical systems, such glitches are intolerable. Further, for systems designed for operation at
25 multiple clock frequencies, low frequency operation is likely to compound the problems since clock period P is very long. Long clock periods may cause propagation delay D to vary over a wider time interval. Thus, there is a need for a delay lock loop which can maintain synchronization
30 over a wide range of clock frequencies and environmental extremes.

SUMMARY OF THE INVENTION

The present invention provides a delay lock loop that
35 synchronizes the reference clock signal with the skewed clock signal using a delay line having an initial propagation delay within a lock window. The lock window is a period of time between the minimum delay of the

propagation delay and the maximum propagation delay. The extent of the lock window is chosen to ensure that changes in environmental conditions or clock frequencies, when compensated for by changing the propagation delay of the delay line, do not cause a loss of synchronization. A delay lock loop in accordance with one embodiment of the present invention incorporates a clock phase shifter in addition to the delay line to synchronize the reference clock. The increased flexibility provided by the clock phase shifter dramatically reduces the probability of losing clock synchronization during system operation.

The delay line receives the reference clock signal from a reference input terminal of the delay lock loop. The output of the delay line (i.e., the delayed clock signal) is provided to the clock phase shifter, which can generate one or more phase-shifted clock signals. An output generator receives the delayed clock signal and the one or more phase-shifted clock signals. The output generator provides one of the clock signals as the output clock signal on an output terminal. A phase detector compares the reference clock signal with the skewed clock signal, which is received on a feedback input terminal of the delay lock loop, to determine whether to increase or decrease the propagation delay of the delay line to synchronize the reference clock signal and the skewed clock signal.

One embodiment of the clock phase shifter generates $N-1$ phase-shifted clock signals. Each of the phase-shifted clock signals is phase-shifted from the other $N-2$ clock signals and the delayed clock signal by $360/N$ degrees. For example, if the clock phase shifter generated 3 phase-shifted clock signals (i.e., N is equal to four), the phase-shifted clock signals would be phase-shifted from the delayed clock signal by 90 degrees, 180 degrees, and 270 degrees. The clock phase shifter can be implemented using N delay lines and a phase detector.

The delay lock loop can include a controller to control the delay line and the output generator. In one embodiment of the invention, the controller causes the output generator

to drive the delayed clock signal as the output clock. The controller synchronizes the reference clock signal with the skewed clock signal by adjusting the propagation delay of the delay line to an initial delay. If the initial delay is not within the lock window, the controller causes the output generator to drive a first phase-shifted clock signal as the output signal. The controller and phase detector then synchronize the reference clock signal with the skewed clock signal by adjusting the propagation delay of the delay line to a second initial delay. If the second initial delay is not within the lock window, the controller causes the output generator to use a second phase-shifted clock signal as the output clock. The controller continues in this manner until an initial delay within the lock window is found.

In another embodiment of the invention, the clock phase shifter is coupled to receive the reference clock signal. The clock phase shifter generates phase-shifted clock signals that are phase-shifted from the reference clock signals. The reference clock signal or one of the phase-shifted clock signals from the clock shifter is selected to be the input signal of the delay line. The delay line is controlled by the controller and the phase detector to delay the input clock signal and synchronize the skewed clock signal with the reference clock signal.

Thus, the present invention provides delay lock loop circuits that can be used in IC devices and digital systems that must endure varying environmental conditions. The delay lock loop circuits of the present invention are well suited for low frequency applications. The present invention will be more fully understood in view of the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a system using a conventional delay lock loop.

Figures 2A, 2B and 2C are timing diagrams for the system of Figure 1.

Figure 3 is a block diagram of a system using an embodiment of a delay lock loop in accordance with the present invention.

5 Figure 4 is a timing diagram for the delay lock loop of Figure 3.

Figure 5 illustrates a lock window as used in accordance with one embodiment of the present invention.

Figure 6 is a block diagram of an embodiment of a clock phase shifter in accordance with the present invention.

10 Figure 7 is a block diagram of another embodiment of a clock phase shifter in accordance with the present invention.

Figure 8 is a block diagram of an output generator in accordance with the present invention.

15 Figure 9 is a state diagram for an embodiment of a controller in accordance with the present invention.

Figure 10 is a block diagram of a system using another embodiment of a delay lock loop in accordance with the present invention.

20

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 3 is a block diagram of a system using a delay lock loop 300 in accordance with one embodiment of the present invention. Delay lock loop 300 comprises a delay line 310, a clock phase shifter 350, a controller 330, an output generator 340, and a phase detector 320. Delay lock loop 300 receives reference clock signal REF_CLK on a reference input terminal 302 and generates output clock signal O_CLK on output terminal 304. As explained above with respect to Figure 1, output clock signal O_CLK is skewed by clock skew 180 into skewed clock signal S_CLK, which clocks logic circuits 190. Skewed clock signal S_CLK is also fed back to a feedback terminal 306 of delay lock loop 300 on feedback path 170.

35 Within delay lock loop 300, reference clock signal REF_CLK is delayed by delay line 310 to generate delayed clock signal D_CLK. Delayed clock signal D_CLK is delayed from clock signal REF_CLK by a propagation delay D in delay

line 310. Adjustable delay lines can also be used with delay lock loop 300. Delayed clock signal D_CLK is provided to an input terminal of a clock phase shifter 350 and to an input terminal of an output generator 340.

5 Clock phase shifter 350 generates one or more phase-shifted clock signals P_CLK_1 to P_CLK_N-1, where N is a positive integer. In one embodiment, phase-shifted clock signal P_CLK_1 is phase-shifted by $360/N$ degrees from delayed clock signal D_CLK. Phase-shifted clock signal
10 P_CLK_2 is phase-shifted by $2*(360/N)$ degrees. Phase-shifted clock signal P_CLK_N-1 is phase-shifted by $(N-1)*(360/N)$ degrees. Thus, in general a phase-shifted clock signal P_CLK_Z is phase-shifted by $Z*(360/N)$, where Z is an integer between 1 and (N-1), inclusive. Delayed clock
15 signal D_CLK can be considered a phase-shifted clock signal P_CLK_0 since delayed clock signal D_CLK has a 0 degree phase shift from itself. Further, in some embodiments of delay lock loop 300, clock phase shifter 350 generates a phase-shifted signal P_CLK_N that has the same phase and
20 frequency as delayed clock signal D_CLK.

 Thus, in an embodiment of clock phase shifter 350 where N is equal to four, phase-shifted clock signal P_CLK_1 is phase-shifted 90 degrees from delayed clock signal D_CLK. It logically follows that phase-shifted clock signal P_CLK_2
25 is phase-shifted by 180 degrees from delayed clock signal D_CLK and phase-shifted clock signal P_CLK_3 is phase-shifted by 270 degrees from delayed clock signal D_CLK. However, the principles of the present invention are also suitable for other embodiments of clock phase shifter 350
30 using other patterns of phase shifting between the phase-shifted clock signals.

 Phase shifting is a concept in the frequency domain of a clock signal. The equivalent of phase shifting in the time domain is delaying the clock signal. Specifically, if
35 a first clock signal is phase-shifted from a second clock signal by X degrees, the first clock signal is delayed by $X*(P/360)$, where P is the period of the first and second clock signals. Thus, if phase-shifted clock signal P_CLK_1

is phase-shifted 90 degrees from delayed clock signal D_CLK, phase-shifted clock signal P_CLK_1 is delayed by one-fourth of the period of delayed clock signal D_CLK. To distinguish delays caused by phase shifting from other propagation
5 delays, delays caused by phase shifting are referred to as phase-shifted delays P_D_Z. Since a phase-shifted clock signal P_CLK_Z is phase-shifted by $Z \cdot (360/N)$ degrees, phase-shifted clock signal P_CLK_Z has a phase-shifted delay P_D_Z equal to $Z \cdot (P/N)$, where Z is an integer between 1 and (N-1),
10 inclusive.

Figure 4 illustrates a timing diagram for delay lock loop 300 (Figure 3) wherein N equals 4. Specifically, clock phase shifter 350 generates phase-shifted clock signal P_CLK_1 90 degrees out of phase with delayed clock signal
15 D_CLK. Thus, phase-shifted clock signal P_CLK_1 is delayed by one-fourth of clock period P. Clock phase shifter 350 generates phase-shifted clock signal P_CLK_2 180 degrees out of phase with delayed clock signal D_CLK. Thus, phase-shifted clock signal P_CLK_2 is delayed by half of clock
20 period P. Finally, clock phase shifter 350 generates phase-shifted clock signal P_CLK_3 270 degrees out of phase with delayed clock signal D_CLK. Thus, phase-shifted clock signal P_CLK_3 is delayed by three-fourths of clock period P.

25 Returning to Figure 3, clock phase shifter 350 provides the phase-shifted clock signals to various input terminals of output generator 340. In some embodiments of delay lock loop 300, clock phase shifter 350 can be configured using one or more configuration signals CFG on an optional
30 configuration bus 360. An embodiment of clock phase shifter 350 that is configured by configuration signals CFG is described below with respect to Figure 7. Configuration signals CFG are received on configuration terminals 308 and are routed to clock phase shifter 350 and controller 330 by
35 configuration bus 360. Output generator 340 selects either delayed clock signal D_CLK or one of the phase-shifted clock signals to provide as output clock signal O_CLK. For embodiments of delay lock loop 300 in which clock phase

shifter 350 provides phase-shifted clock signal P_CLK_N, output generator 340 can use phase-shifted clock signal P_CLK_N in place of delayed clock signal D_CLK. Controller 330 controls output generator 340.

5 Controller 330 receives phase information regarding reference clock signal REF_CLK and skewed clock signal S_CLK from phase detector 320. Specifically, phase detector 320 informs controller 330 whether propagation delay D from delay line 310 should be increased or decreased to achieve
10 synchronization of skewed clock signal S_CLK with reference clock signal REF_CLK. For embodiments of phase detector 320 that only determine whether to increase or decrease propagation delay D, a jitter filter (not shown) can be used to reduce clock jitter. In one embodiment, the jitter
15 filter is an up/down counter (not shown) that decrements by one if propagation delay D should be decreased and increments by one if propagation delay D should be increased. However, propagation delay D is not adjusted until the up/down counter reaches 0 or some other
20 predetermined number. When propagation delay D is adjusted, the up/down counter is reset to one-half the maximum value. In other embodiments, phase detector 320 calculates the amount propagation delay D should be increased or decreased. During lock acquisition, controller 330 attempts to
25 synchronize skewed clock signal S_CLK with reference clock signal REF_CLK so that initial propagation delay ID of propagation delay D is within a lock window W.

 Figure 5 illustrates the concepts of lock window W. As explained above, propagation delay D must be between minimum
30 propagation delay D_MIN and maximum propagation delay D_MAX. Typical values for D_MIN and D_MAX are 3.2 nanoseconds and 46.8 nanoseconds, respectively. During lock acquisition, controller 330 ensures that initial propagation delay ID of propagation delay D is within lock window W. Specifically,
35 when synchronization is first established initial propagation delay ID must be between lock window minimum W_MIN and lock window maximum W_MAX. The limits on lock window W are set to guarantee that once delay lock loop 300

completes locks acquisition, delay lock loop 300 can maintain synchronization as long as the system containing delay lock loop 300 operates within the design guidelines of the system.

5 For example, the system containing delay lock loop 300 generally can operate in a range of operating conditions. The range of operating conditions includes a maximum extreme condition in which propagation delay SKEW is maximized at a propagation delay value SKEW_MAX. Similarly, the range of
10 operating conditions also includes a minimum extreme condition in which propagation delay SKEW is minimized at a propagation delay value SKEW_MIN. Thus, the maximum change (DELTA_SKEW) in propagation delay SKEW during operation of the system is equal to propagation delay value SKEW_MAX
15 minus propagation delay value SKEW_MIN (i.e., DELTA_SKEW = SKEW_MAX - SKEW_MIN). For maximum protection during lock maintenance, lock window minimum W_MIN can be equal to minimum propagation delay D_MIN plus DELTA_SKEW. Similarly, lock window maximum W_MAX can be equal to maximum
20 propagation delay D_MAX minus DELTA_SKEW. In one embodiment of the present invention, lock window minimum W_MIN is equal to approximately 16.5% of maximum propagation delay D_MAX and lock window maximum W_MAX is equal to approximately 67.8% of maximum propagation delay D_MAX.

25 As explained above with respect to Figure 1, for a conventional delay lock loop synchronization of skewed clock signal S_CLK with reference clock signal REF_CLK is achieved when propagation delay D plus propagation delay SKEW is equal to a multiple of period P. In equation form:

30

$$D + SKEW = MULT(P) \quad (1)$$

where MULT(P) refers to a multiple of P. Usually, the smallest multiple of P greater than SKEW is used.

35 With delay lock loop 300, controller 330 can also use the delays from the phase-shifted clock signals. Thus delay lock loop 300 can achieve synchronization if propagation delay D plus a phase-shifted delay P_D from a phase-shifted

clock signal plus propagation delay SKEW is a multiple of period P. In equation form:

$$D + P_D_Z + SKEW = MULT(P) \quad (2)$$

5

where P_D_Z refers to a phase-shifted delay from phase-shifted clock signal P_CLK_Z. Usually, the smallest multiple of P greater than propagation delay SKEW plus phase-shifted delay P_D_Z is used. As explained above with respect to Figure 3, in one embodiment of clock phase shifter 350 phase-shifted delay P_D_Z of a phase-shifted clock signal P_CLK_Z is equal to $Z*(P/N)$, where Z is an integer between 0 and (N-1), inclusive. If Z is equal to 0, controller 330 causes output generator 340 to use delayed clock signal D_CLK as output clock signal O_CLK. Thus, phase-shifted delay P_D_0 is equal to 0.

10

For clarity, initial delay ID can be referred to initial delay ID_0 if output generator 340 uses delayed clock signal D_CLK for output clock signal O_CLK. Similarly, initial delay ID can be referred to as initial delay ID_Z, if output generator 340 uses phase-shifted clock signal P_CLK_Z for output clock signal O_CLK, where Z is a positive integer between 1 and (N-1), inclusive. Thus, at the end of lock acquisition, equation (2) can be rewritten as:

15

20

25

$$ID_Z + P_D_Z + SKEW = MULT(P) \quad (3)$$

Re-arranging equation (3) provides:

30

$$ID_Z = MULT(P) - SKEW - P_D_Z \quad (4)$$

and substituting $Z*(P/N)$ for P_D_Z provides:

35

$$ID_Z = MULT(P) - SKEW - Z*(P/N) \quad (5)$$

Usually, the smallest multiple of P that results in a positive initial delay ID_Z is used. In situations where initial delay ID_Z is less than minimum propagation delay D_MIN or greater than maximum propagation delay D_MAX, delay
5 lock loop 300 cannot synchronize skewed clock signal S_CLK with reference clock signal REF_CLK using phase-shifted clock signal P_CLK_Z.

Because controller 330 can select any one of phase-shifted clock signals P_CLK_Z to drive output clock signal
10 O_CLK, controller 330 can select from N initial delay values. The possible initial delay values range from a minimum offset value ($MULT(P) - SKEW$) to a maximum value ($MULT(P) - SKEW + (N-1)/(N * \text{period } P)$). The difference between each initial delay value is period P divided by N.
15 For example, if N equals four, period P equals 40 nanoseconds, and propagation delay SKEW equals 25 nanoseconds; then initial delays ID_0, ID_1, ID_2, and ID_3 equal 15 nanoseconds, 5 nanoseconds, 35 nanoseconds, and 25 nanoseconds, respectively (as calculated using equation
20 (5)). If N equals four, period P equals 40 nanoseconds, and propagation delay SKEW equals 55 nanoseconds; then initial delays ID_0, ID_1, ID_2, and ID_3 equal 25 nanoseconds, 15 nanoseconds, 5 nanoseconds, and 35 nanoseconds, respectively. Thus, controller 330 is likely to find one or
25 more initial delay values within lock window W. If more than one initial delay value is within lock window W, controller 330 can select any one of the initial delay values within lock window W.

Some embodiments of controller 330 can perform the
30 calculations described above to determine which phase-shifted clock signal P_CLK_Z to use. However, other embodiments use trial and error to determine which phase-shifted clock signal P_CLK_Z to use. An embodiment of controller 330 that uses trial and error is described below
35 with respect to Figure 9.

Figure 6 illustrates one embodiment of clock phase shifter 350 of Figure 3. The embodiment of clock phase shifter 350 in Figure 6 comprises a phase detector 620 and a

plurality of delay lines 610_1 to 610_N. Delay lines 610_1 to 610_N are coupled in series. The input terminal of delay line 610_1 receives an input clock signal such as delayed clock signal D_CLK (Figure 3). The output terminal of delay line 610_N is coupled to an input terminal of phase detector 620. Phase detector 620 also receives input clock signal D_CLK on another input terminal. Phase detector 620 controls all the delay lines in parallel via control line 625, and each delay line provides the same amount of propagation delay. Consequently, input clock signal D_CLK and the clock signal P_CLK-N on the output terminal of delay line 610_N are synchronized, i.e., in phase. Further, phase detector 620 causes the total propagation delay generated by delay lines 610_1 to 610_N to be equal to one period P of the input clock. Thus, each delay line provides a propagation delay of P/N . Thus, the output terminal of delay line 610_1 provides a clock signal that is delayed from the input clock signal by P/N whereas the output terminal of delay line 610_2 provides a clock signal that is delayed from the input clock signal by $2*P/N$. In general, the output terminal of delay line 610_Z provides a clock signal that is delayed from the input clock signal by $Z*P/N$, where Z is an integer between 1 and N-1, inclusive. Accordingly, if the input clock signal is delayed clock signal D_CLK, the output terminals of delay lines 610_1 to 610_N-1 provide phase-shifted clock signals P_CLK_1 to P_CLK_N-1, respectively. Some embodiments of clock phase shifter 350 also generate a clock signal P_CLK_N on the output terminal of delay line 610_N that has the same phase as delayed clock signal D_CLK.

Figure 7 shows a configurable embodiment of clock phase shifter 350 of Figure 3. Specifically, the clock phase shifter of Figure 7 can be configured in a first mode to produce three phase-shifted clock signals that are 90 degrees, 180 degrees, and 270 degrees out of phase with an input clock signal. In a second mode, the clock phase shifter of Figure 7 produces a single phase-shifted clock signal that is 180 degrees out of phase with the input clock

terminals of delay lines 710_2 and 710_4 to ground reduces power consumption and switching noise. However, in the second mode the embodiment of Figure 7 produces only one output clock signal, which is 180 degrees out of phase with the input clock signal and is generated at the output terminal of multiplexer 730_2.

Figure 8 shows one embodiment of output generator 340 of Figure 3. The output generator of Figure 8 comprises an N-input multiplexer 810. N-input multiplexer 810 has N input terminals, referenced as 810_0 to 810_N-1, select terminals 812, and an output terminal 814. When the embodiment of output generator 340 of Figure 8 is used in delay lock loop 300 of Figure 3, select terminals 812 are coupled to controller 330, input terminal 810_0 is coupled to receive delayed clock signal D_CLK, output terminal 814 provides output clock signal O_CLK, and input terminals 810_1 to 810_N-1 are coupled to receive phase-shifted clock signals P_CLK_1 to P_CLK_N-1, respectively. Select signals on select terminals 812 determine which input signal is provided on output terminal 814. Other embodiments of output generator 340 may include additional circuitry, such as clock buffers and clock dividers. In addition, some embodiments of output generator 340 drive additional clock signals, such as various versions of the phase-shifted clock signals.

Figure 9 shows a state diagram 900 for one embodiment of controller 330 of Figure 3. On power-up or reset, controller 330 transitions to reset stage 910. In reset stage 910, controller 330 sets a phase counter (not shown) to zero, which causes output generator 340 to provide delayed clock signal D_CLK as output clock signal O_CLK, and adjusts propagation delay D of delay line 310 (Figure 3) to a starting delay value. Starting delay values for propagation delay D include, for example, minimum propagation delay D_MIN, maximum propagation delay D_MAX, or the average of minimum propagation delay D_MIN and maximum propagation delay D_MAX. Controller 910 then transitions to lock acquisition stage 920.

In lock acquisition stage 920, controller 330 synchronizes reference clock signal REF_CLK and skewed clock signal S_CLK. Specifically, controller 330 adjusts propagation delay D of delay line 310 based on signals from phase detector 320. Phase detector 320 determines whether propagation delay D must be increased or decreased to synchronize skewed clock signal S_CLK with reference clock signal REF_CLK. Lock acquisition is described above in greater detail with respect to Figures 3-6; therefore, the description is not repeated. In some embodiments, clock phase shifter 350 is also reset by the power-on/reset signal. For some of these embodiments, controller 330 does not adjust propagation delay D until after clock phase shifter 350 produces phase-shifted clock signals P_CLK_1 to P_CLK_N-1. If controller 330 cannot synchronize skewed clock signal S_CLK with reference clock signal REF_CLK, controller 330 transitions to increment phase stage 950, described below. Otherwise, controller 330 transitions to check lock window stage 930 after controller 330 synchronizes skewed clock signal S_CLK with reference clock signal REF_CLK (with an initial propagation delay ID in delay line 310).

In check lock window stage 930, controller 330 must determine whether initial propagation delay ID is within lock window W. Specifically, propagation delay ID is within lock window W if propagation delay ID is greater than lock window minimum W_MIN and less than lock window maximum W_MAX. If initial propagation delay ID is not within lock window W, controller 330 transitions to increment phase stage 950. Otherwise, controller 330 transitions to lock maintenance stage 940.

In lock maintenance stage 940, controller 330 adjust propagation delay D of delay line 310 to maintain synchronization of skewed clock signal S_CLK with reference clock signal REF_CLK. Lock maintenance is described above in greater detail; therefore, the description is not repeated. As described above, the present invention can maintain lock throughout the systems environment conditions.

Therefore, controller 330 remains in lock maintenance stage 940 unless a reset occurs that causes controller 330 to transition to reset stage 910.

5 In increment phase stage 950, controller 330 increments the phase counter, which causes output generator 340 to select a different phase-shifted clock signal. Further, controller 330 resets delay line 310 so that propagation delay D returns to the starting delay value used in reset stage 910. Controller 330 then transitions to lock acquisition stage 920 and proceeds as described above.

10 Figure 10 is a block diagram of another embodiment of delay lock loop 300. The embodiment of Figure 10 uses the same principles as described above with respect to the embodiment of Figure 3. However, in the embodiment of Figure 10, clock phase shifter 350 generates phase-shifted clock signals P_CLK_1 to P_CLK_N-1 using reference clock signal REF_CLK. Reference clock signal REF_CLK and phase-shifted clock signals P_CLK_1 to P_CLK_N-1 are coupled to an input selector 1040. Input selector 1040 selects either reference clock signal REF_CLK or one of phase-shifted clock signals P_CLK_1 to P_CLK_N-1 as a delay line input clock signal DLI_CLK, which is provided to the input terminal of delay line 310. Delay line 310 drives output clock signal O_CLK. A controller 1030 controls input selector 1040 and delay line 310 based on the phase information provided by phase detector 320 so that delay line 310 provides a propagation delay D that synchronizes skewed clock signal S_CLK with reference clock signal REF_CLK. Input selector 1040 can be implemented using the same circuit design as output generator 340.

25 In the various embodiments of the present invention, novel structures have been described for delay lock loops. By using a clock phase shifter to provide propagation delays proportional to the period of a clock signal, the present invention can provide clock signal control of the initial propagation delay at lock acquisition. By accepting only initial propagation delays within a lock window, the present invention can maintain synchronization of the clock signals

over the entire range of environmental conditions of a system using the present invention. Further, since the clock phase shifter provides propagation delays proportional to the period of the clock signal, the present invention is applicable to systems using both high and low frequency clock signals. In addition, the delay lock loop of the present invention can be implemented with purely digital circuits that can be completely incorporated on a single silicon chip such as an FPGA, a DSP chip, or a microprocessor.

The various embodiments of the structures and methods of this invention that are described above are illustrative only of the principles of this invention and are not intended to limit the scope of the invention to the particular embodiments described. For example, in view of this disclosure those skilled in the art can define other clock phase shifters, delay lines, output generators, controllers, phase detectors, and so forth, and use these alternative features to create a method, circuit, or system according to the principles of this invention. Thus, the invention is limited only by the following claims.

CLAIMS

What is claimed is:

- 5 1. A delay lock loop (DLL) circuit having a reference input terminal, a feedback input terminal, and an output terminal, the DLL circuit comprising:
 - a first delay line coupled to the reference input terminal;
 - a clock phase shifter coupled to the first delay line;
 - 10 a output generator coupled to the output terminal of the DLL circuit, the first delay line, and the clock phase shifter; and
 - a first phase detector coupled to the feedback input terminal, the reference input terminal and the first delay line.
- 15 2. The DLL circuit of Claim 1, wherein the clock phase shifter generates a plurality of (N-1) phase-shifted clock signals with each of the phase-shifted clock signals phase-shifted by $360/N$ degrees from another phase-shifted clock signal within the plurality of phase-shifted clock signals.
- 20 3. The DLL circuit of Claim 1, wherein the output generator is coupled to the first delay line through the clock phase shifter.
- 25 4. The DLL circuit of Claim 1, further comprising a controller coupled to the output generator and coupled between the first delay line and the phase detector, wherein:
 - the delay line provides a propagation delay for a first clock signal on the reference input terminal;
 - the controller decreases the propagation delay if a
 - second clock signal on the feedback input terminal lags the
 - 35 first clock signal; and
 - the controller increases the propagation delay if the first clock signal lags the second clock signal.

5. The DLL circuit of Claim 1, wherein the clock phase shifter comprises:

a second delay line having

an input terminal coupled to the first delay

5 line and

an output terminal;

a third delay line having

an input terminal coupled to the output

terminal of the second delay line and

10 an output terminal; and

a second phase detector controlling the second delay line and the third delay line, the second phase detector having a first input terminal coupled to the first delay line and a second input terminal coupled to the output terminal of the third delay line.

15

6. The DLL circuit of Claim 5, wherein the input terminal of the third delay line is coupled to the output terminal of the second delay line through a fourth delay line.

20

7. The DLL circuit of Claim 5, wherein:

the input terminal of the third delay line is coupled to the output terminal of the second delay line through a fourth delay line, a fifth delay line, a first multiplexer, a second multiplexer, and a third multiplexer; and

25

the second input terminal of the second phase detector is coupled to the output terminal of the third delay line through a fourth multiplexer.

8. The DLL circuit of Claim 7, wherein:

the first multiplexer has a first input terminal coupled to the output terminal of the second delay line, a second input terminal coupled to ground, and an output terminal;

the fourth delay line has an input terminal coupled to the output terminal of the first multiplexer, and an output terminal;

the second multiplexer has a first input terminal coupled to the output terminal of the fourth delay line, a second input terminal coupled to the output terminal of the second delay line, and an output terminal;

the fifth delay line has an input terminal coupled to the output terminal of the second multiplexer, and an output terminal;

the third multiplexer has a first input terminal coupled to the output terminal of the fifth delay line, a second input terminal coupled to ground, and an output terminal coupled to the input terminal of the third delay line; and

the fourth multiplexer has a first input terminal coupled to the output terminal of the third delay line, a second input terminal coupled to the output terminal of the fifth delay line, and an output terminal coupled to the second input terminal of the second phase detector.

1/12

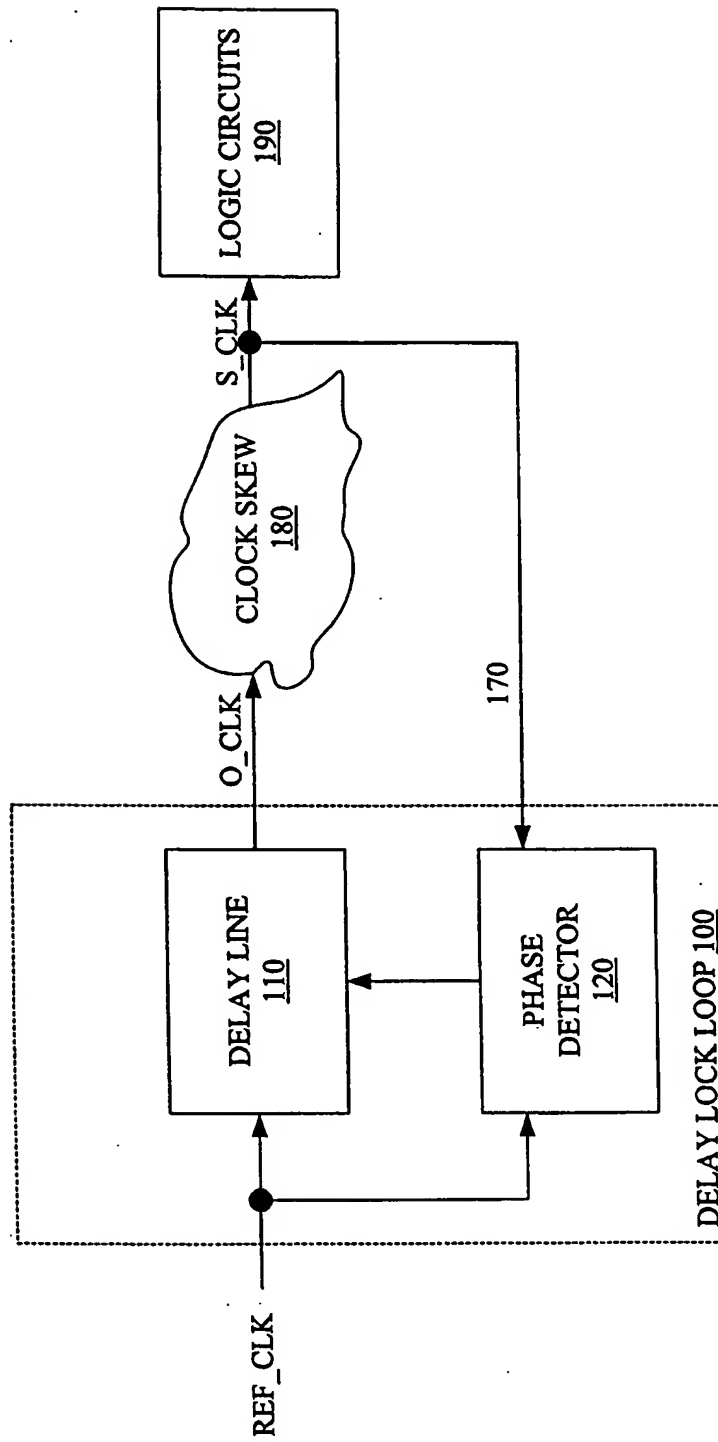


FIGURE 1 (Prior Art)

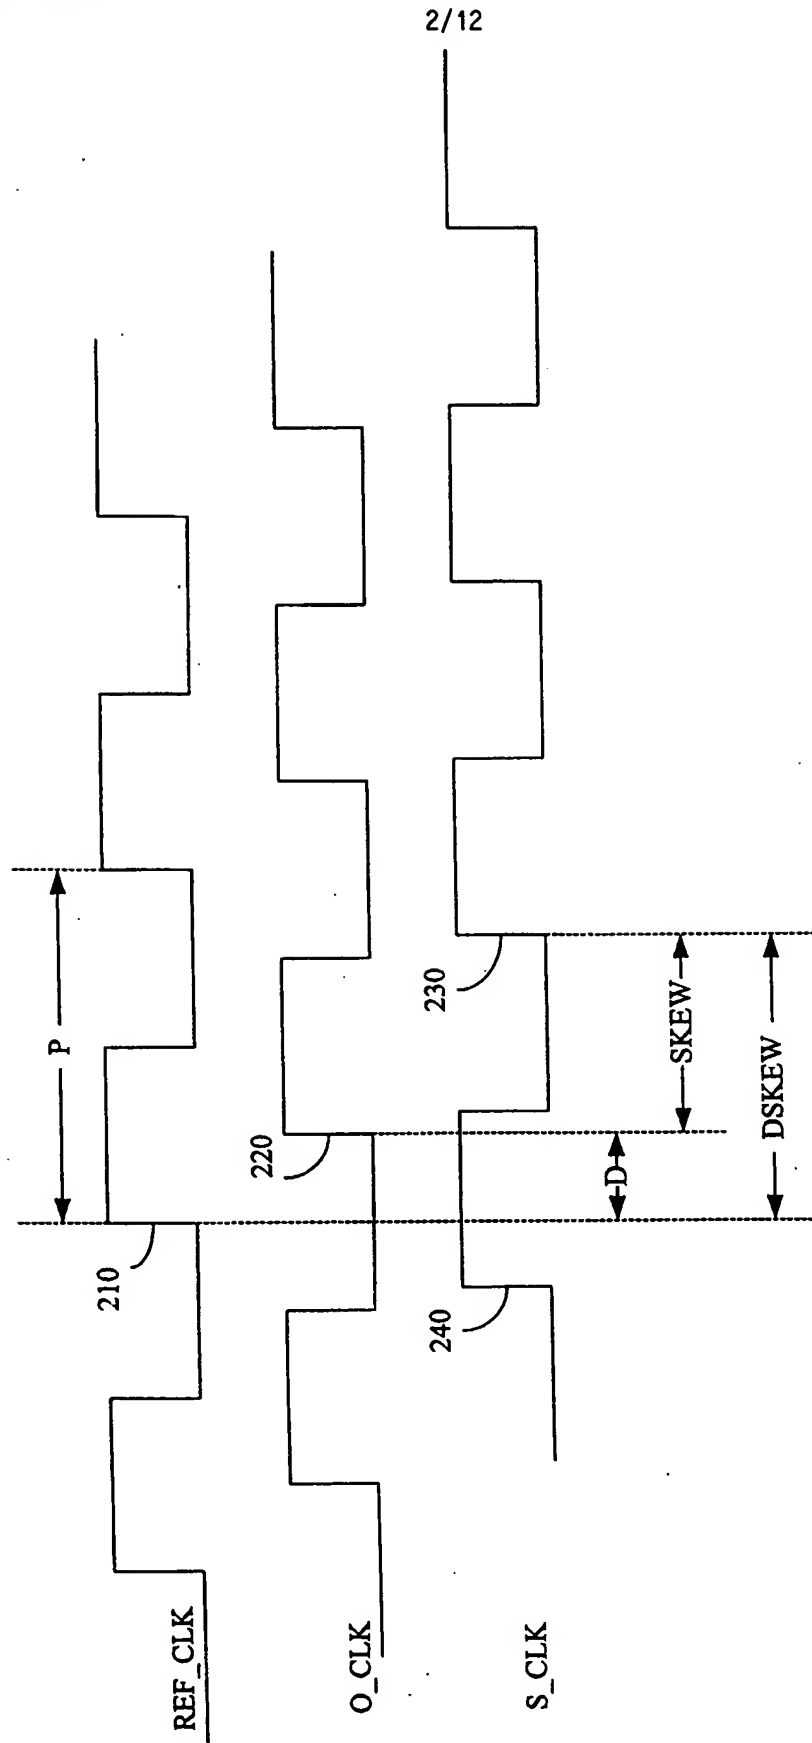


FIGURE 2A

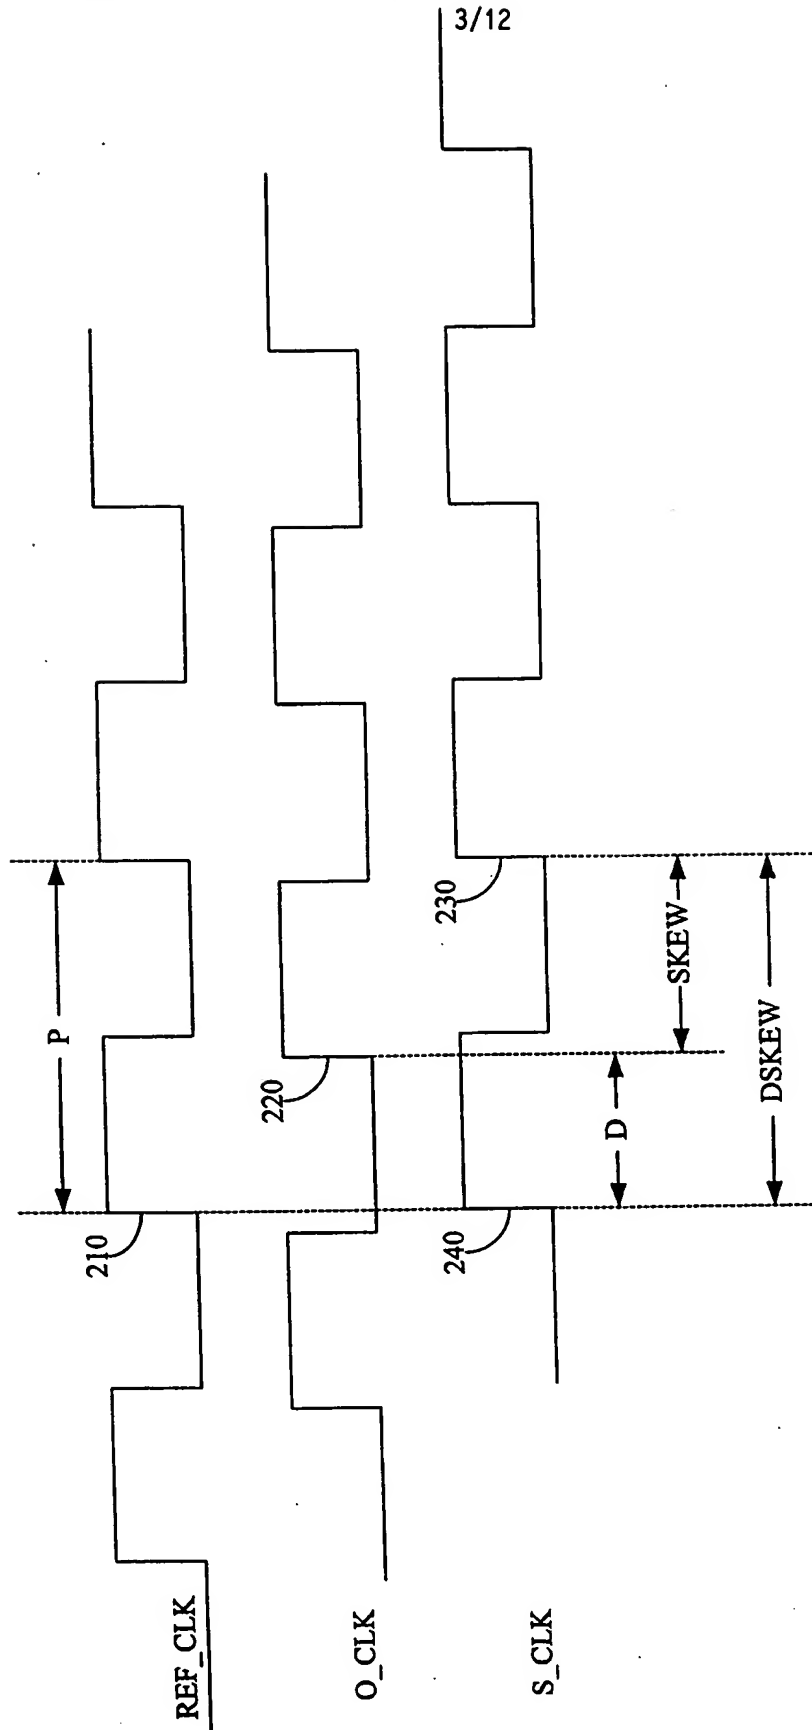


FIGURE 2B

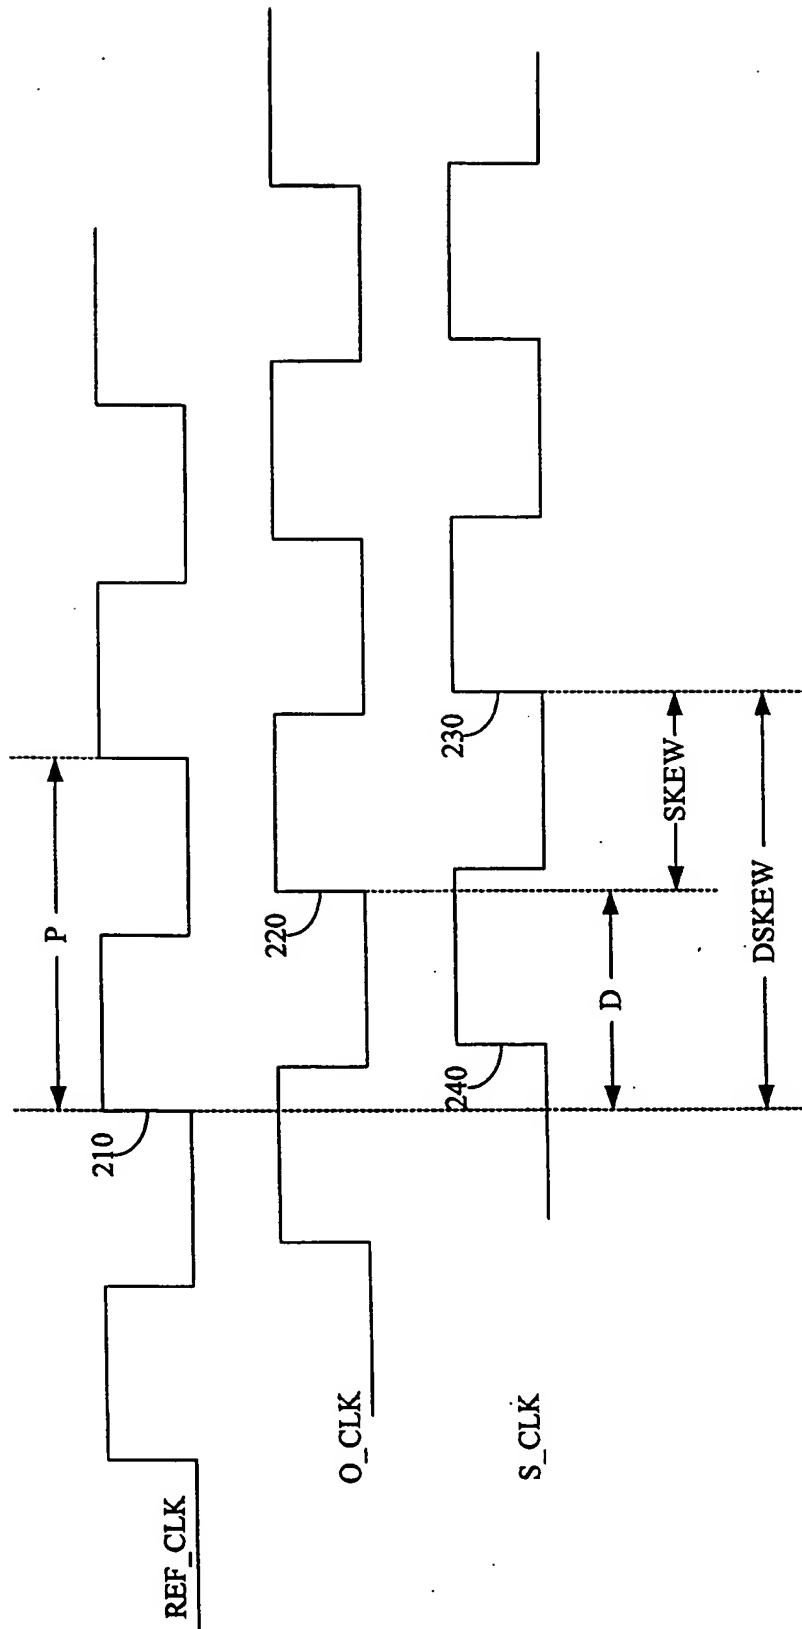


FIGURE 2C

5/12

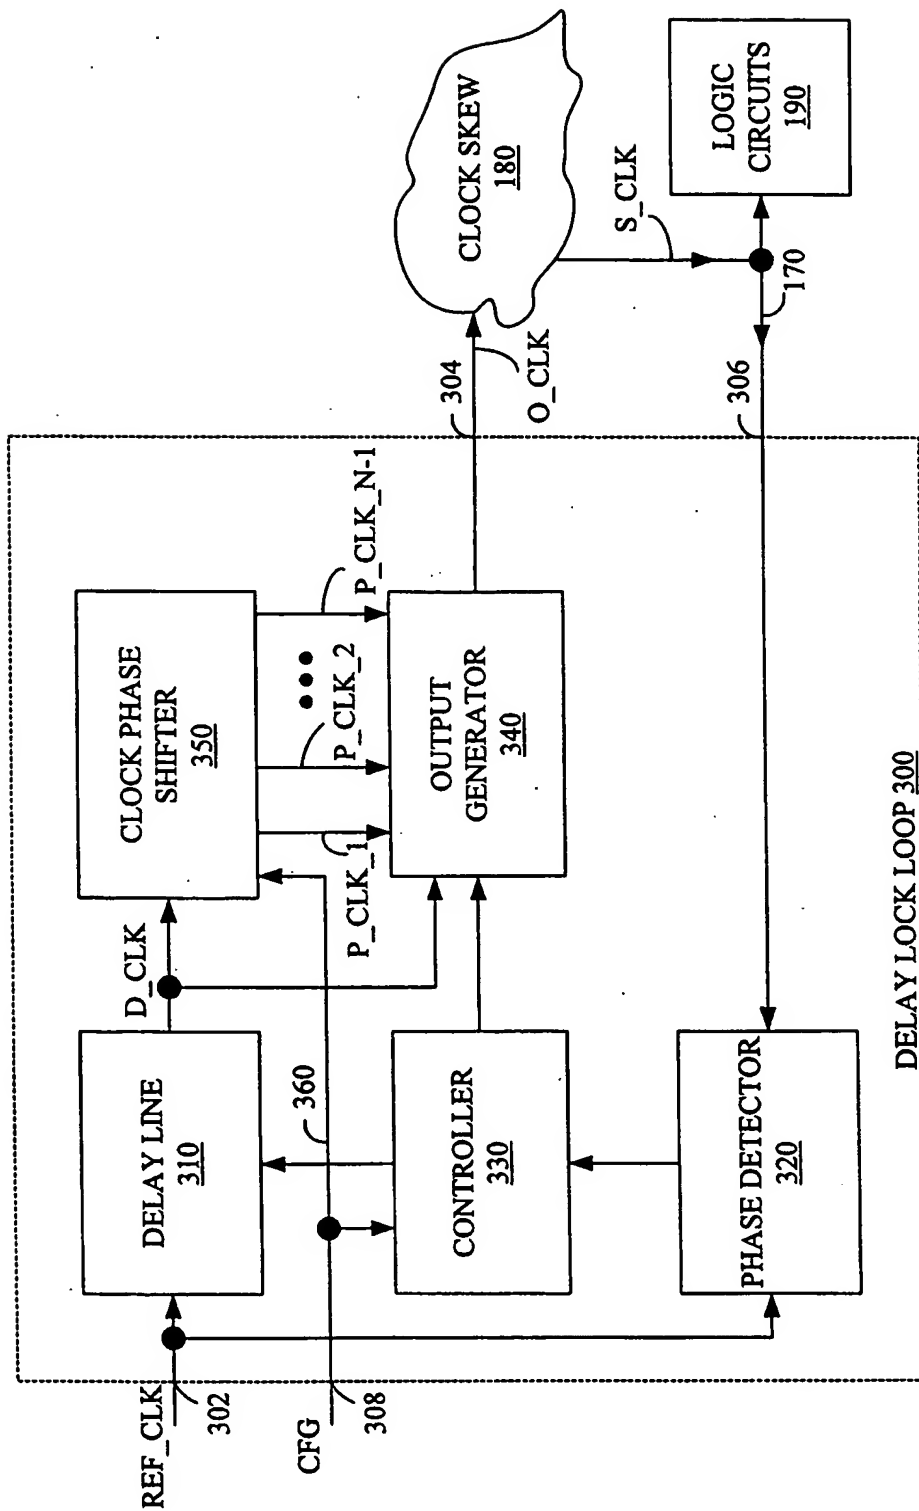


FIGURE 3

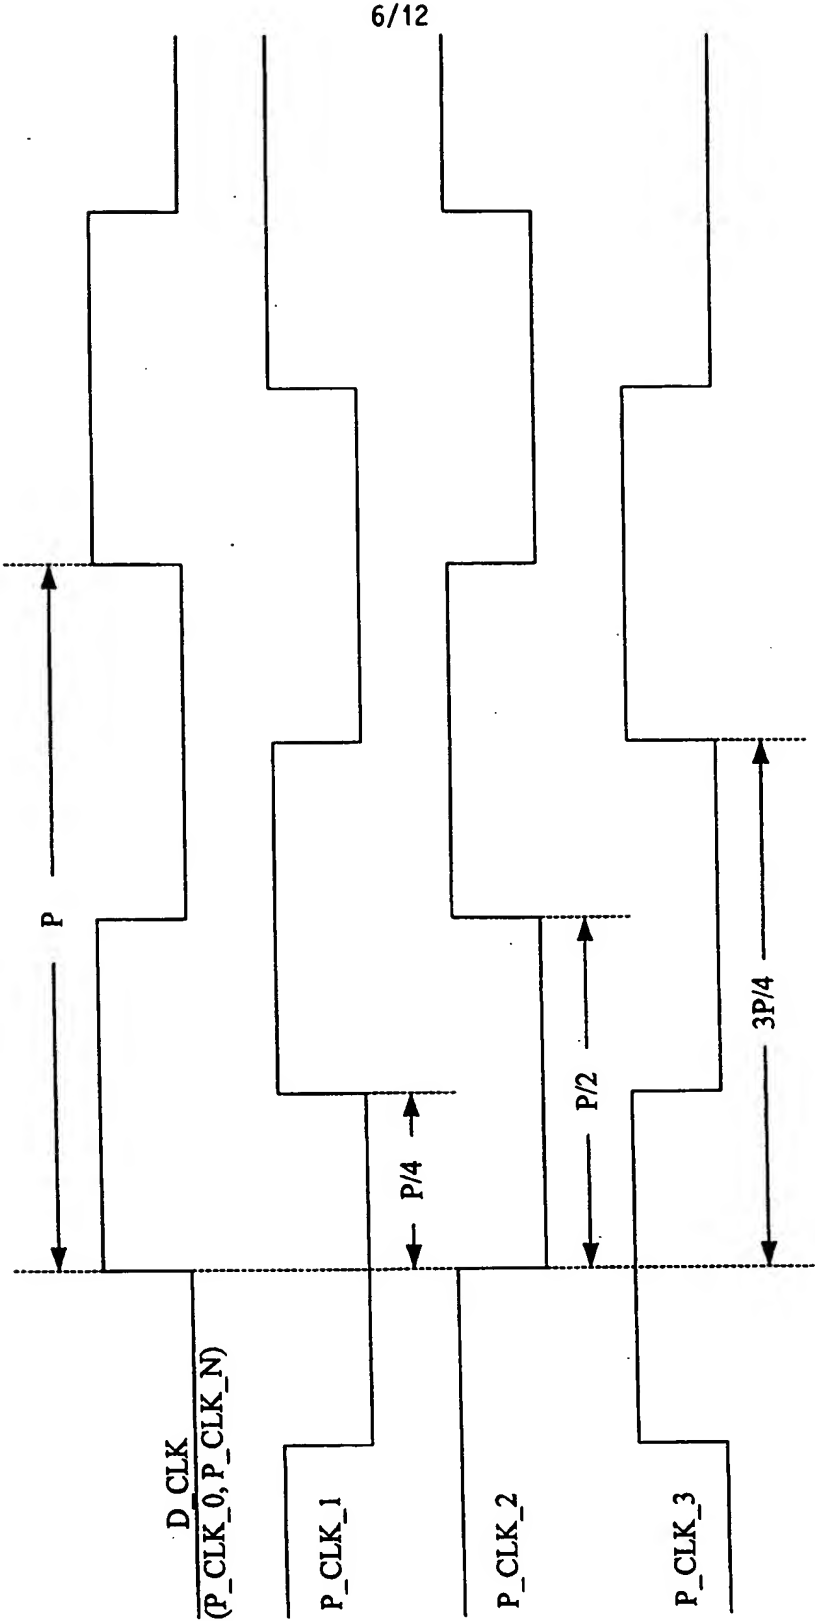


FIGURE 4

7/12

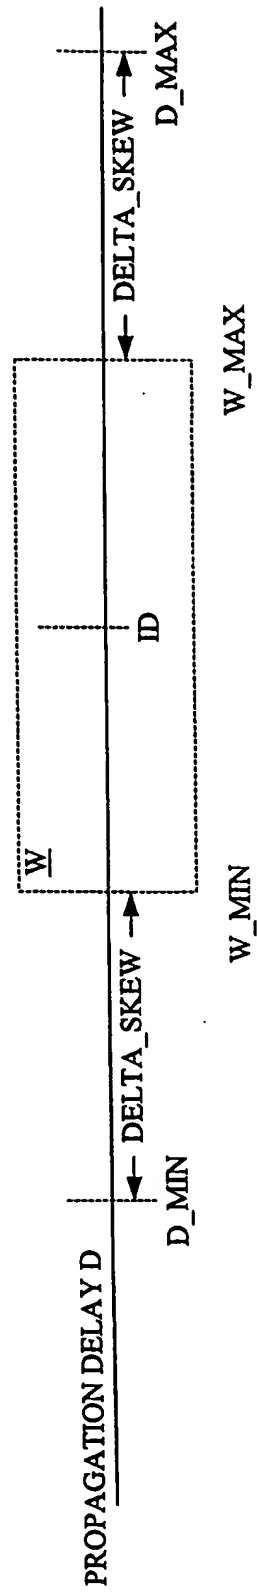


FIGURE 5

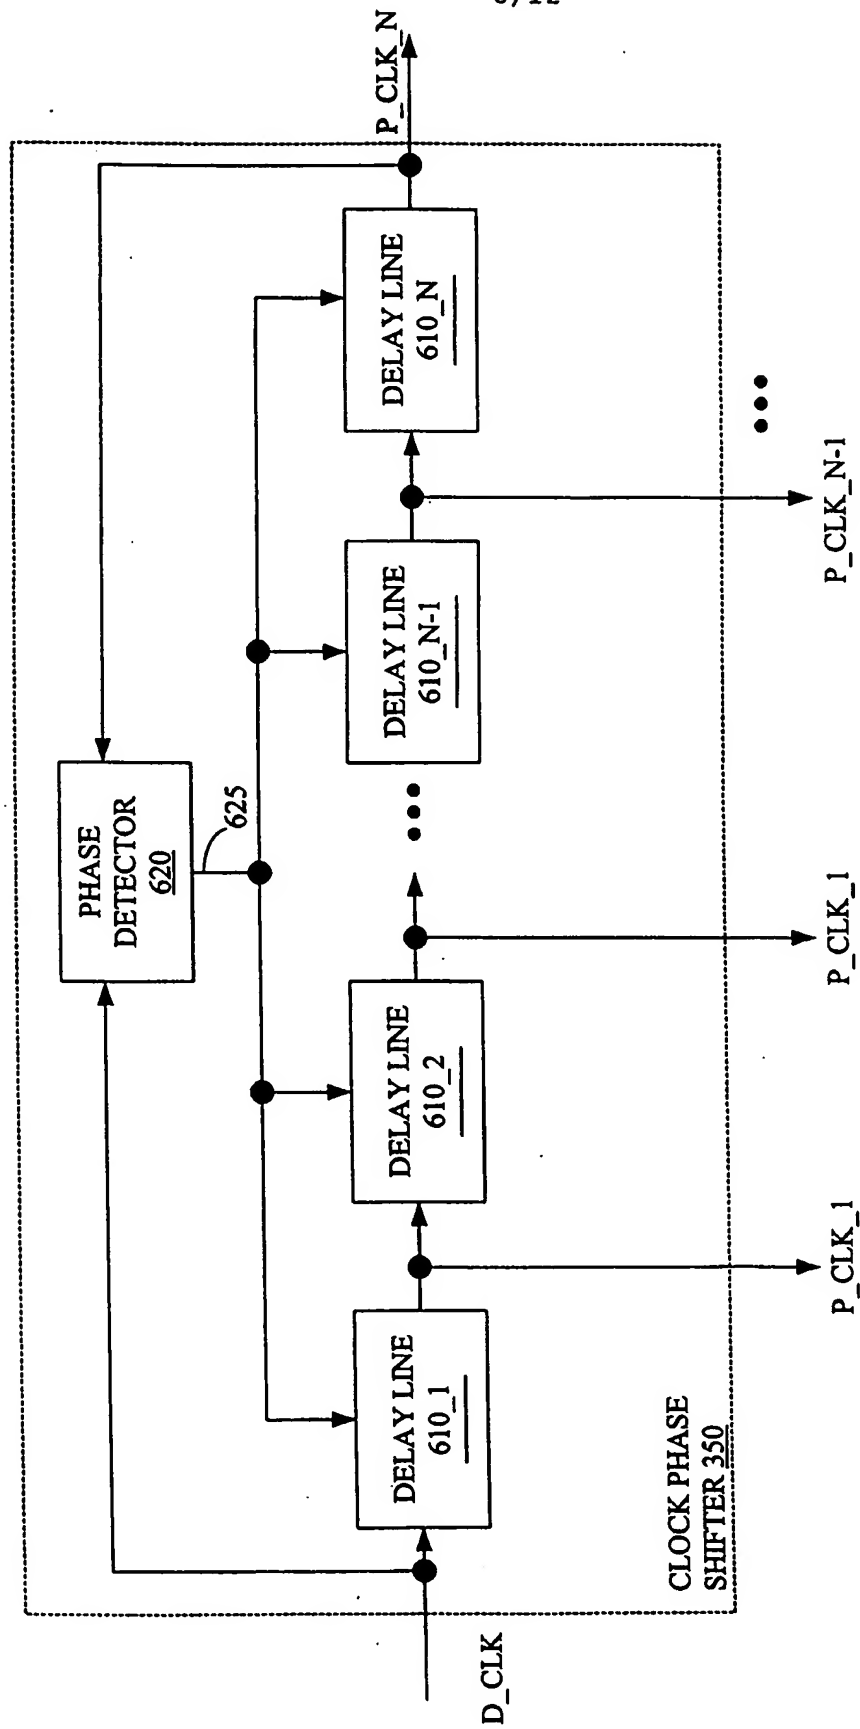


FIGURE 6

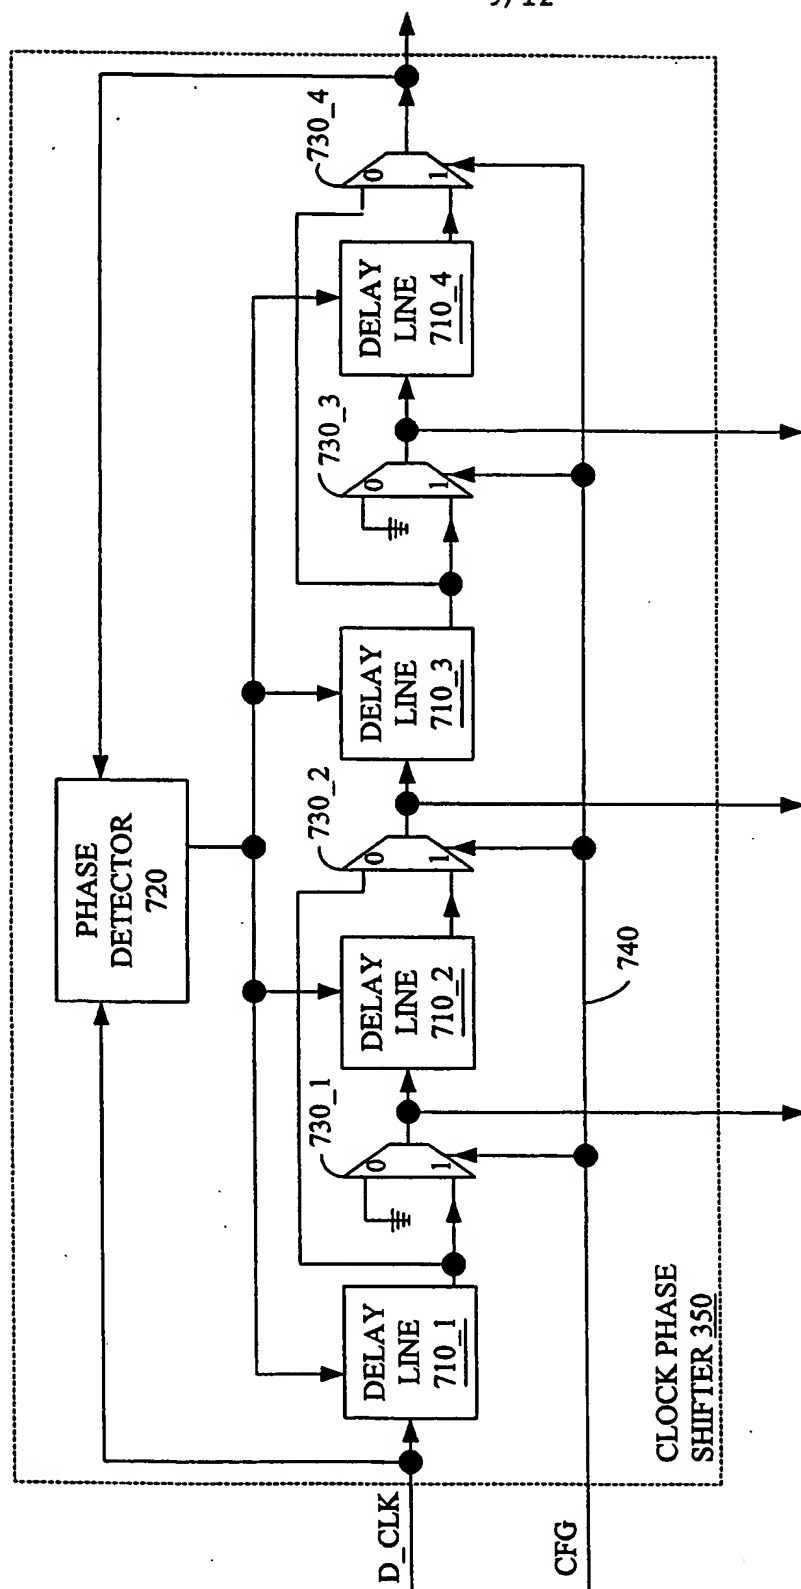


FIGURE 7

10/12

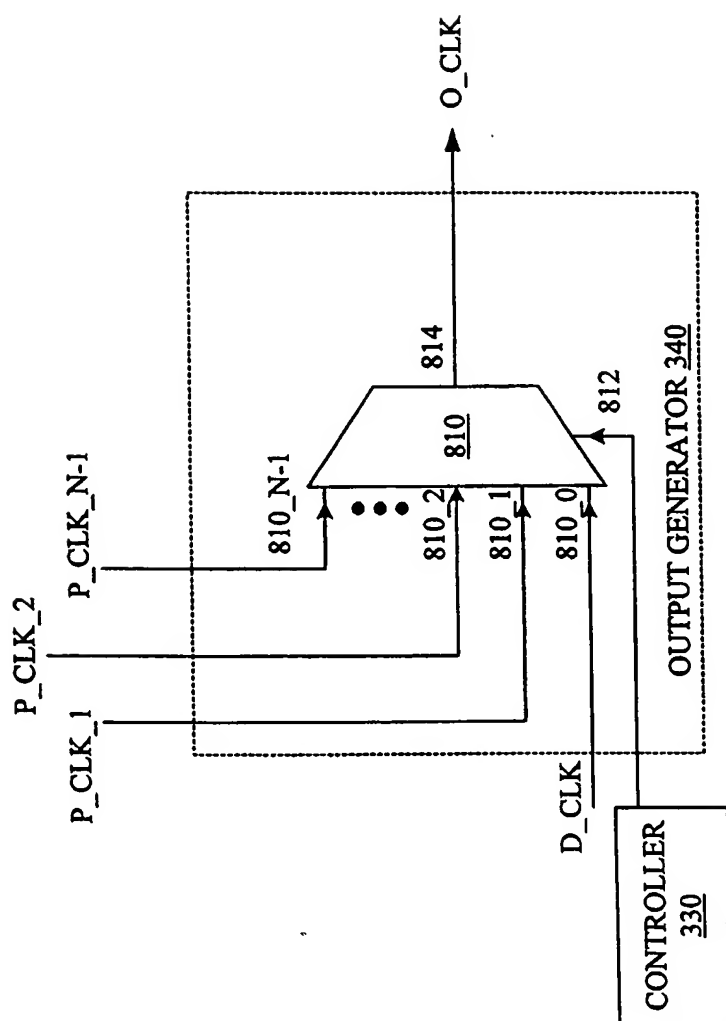


FIGURE 8

10/12

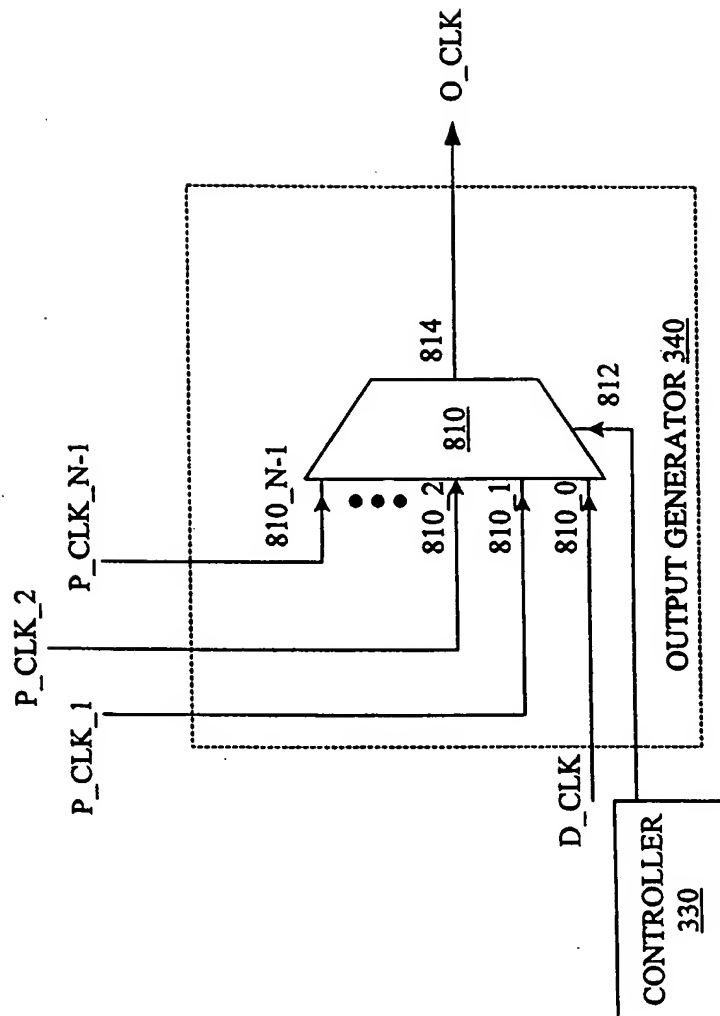


FIGURE 8

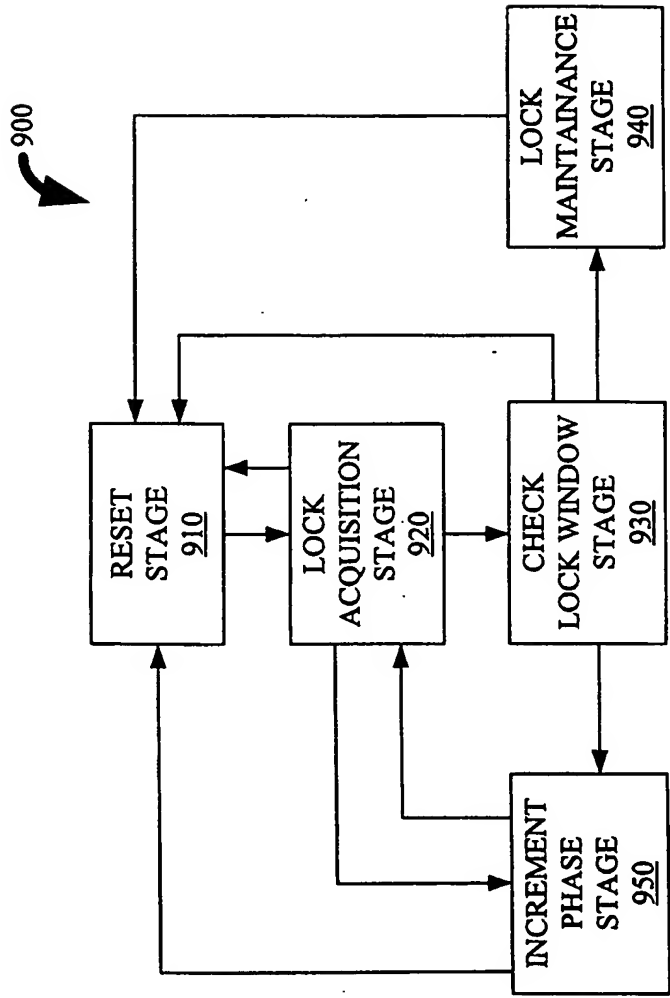


FIGURE 9

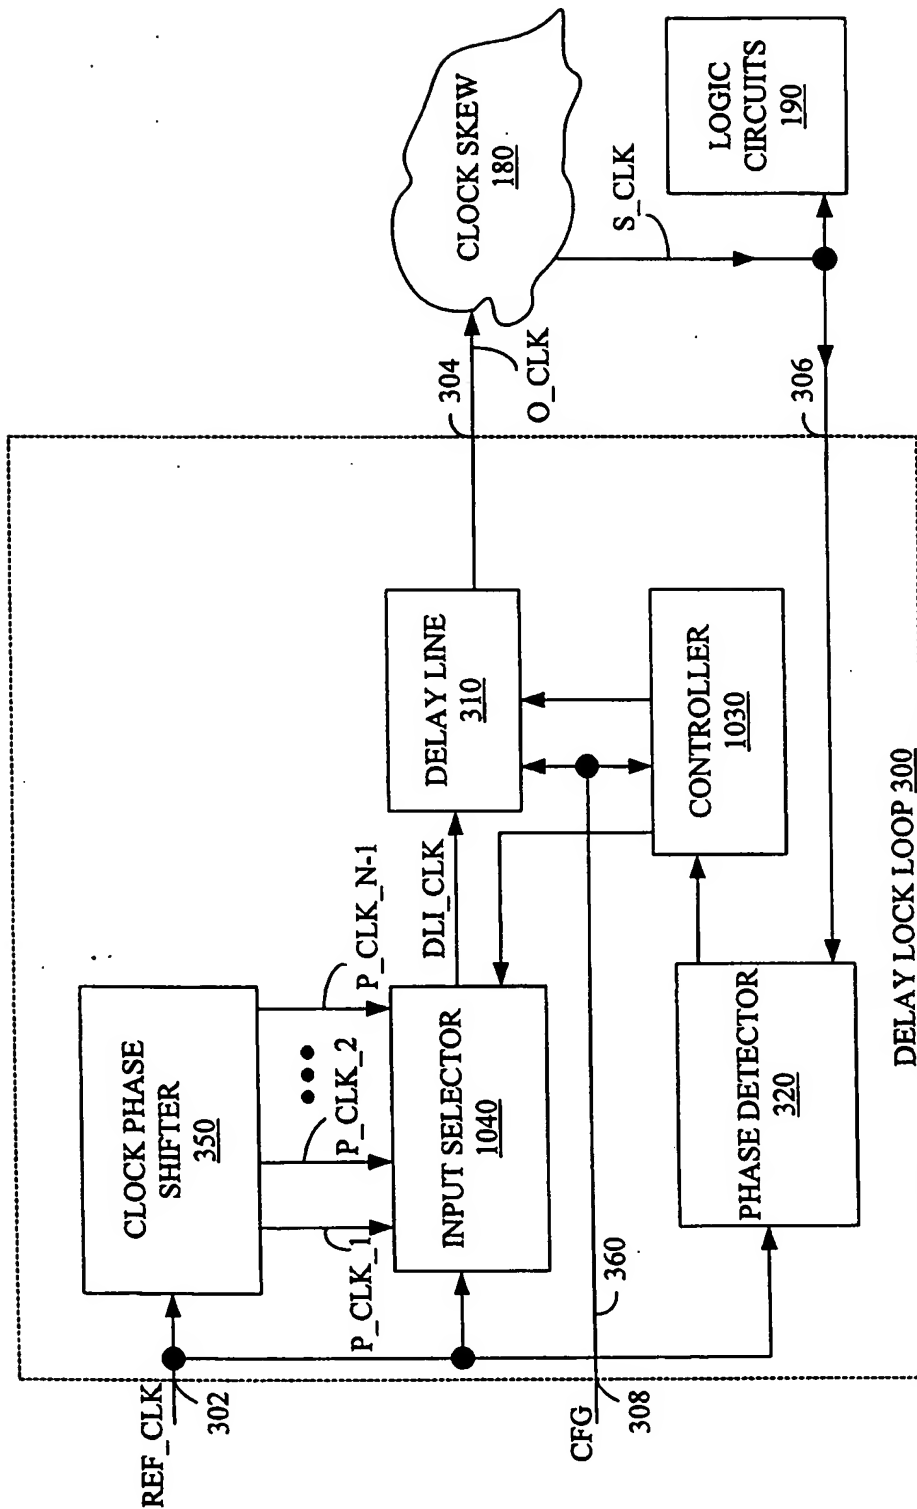


FIGURE 10

INTERNATIONAL SEARCH REPORT

L. National Application No

PCT/US 99/07775

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03L7/081 H03K5/13

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03L H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 704 975 A (NIPPON ELECTRIC CO) 3 April 1996 (1996-04-03)	1-4
Y	column 3, line 25 - column 6, line 32; figure 3	5-8
X	US 5 489 864 A (ASHURI RONI) 6 February 1996 (1996-02-06)	1-4
Y	column 2, line 10 - column 5, line 30; figure 2	5-8
Y	WO 97 40576 A (CREDENCE SYSTEMS CORP) 30 October 1997 (1997-10-30) the whole document	5-8
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 July 1999

Date of mailing of the international search report

04/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Kahn, K-D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/07775

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 646 564 A (PIERCE KERRY M ET AL) 8 July 1997 (1997-07-08) column 4, line 24 - column 5, line 65 ---	5-8
Y	EP 0 655 840 A (AT & T CORP) 31 May 1995 (1995-05-31) page 4, line 20 - page 6, line 9 ---	5-8
P,X	WO 99 14759 A (MICRON TECHNOLOGY INC) 25 March 1999 (1999-03-25) page 18, line 14 - page 23, line 8; figure 5 -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/US 99/07775

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0704975 A	03-04-1996	JP 2771464 B JP 8097715 A US 5604775 A	02-07-1998 12-04-1996 18-02-1997
US 5489864 A	06-02-1996	NONE	
WO 9740576 A	30-10-1997	NONE	
US 5646564 A	08-07-1997	US 5815016 A	29-09-1998
EP 0655840 A	31-05-1995	US 5463337 A JP 7202655 A	31-10-1995 04-08-1995
WO 9914759 A	25-03-1999	AU 9571698 A	05-04-1999